




OPTION 1 MAST FOOT

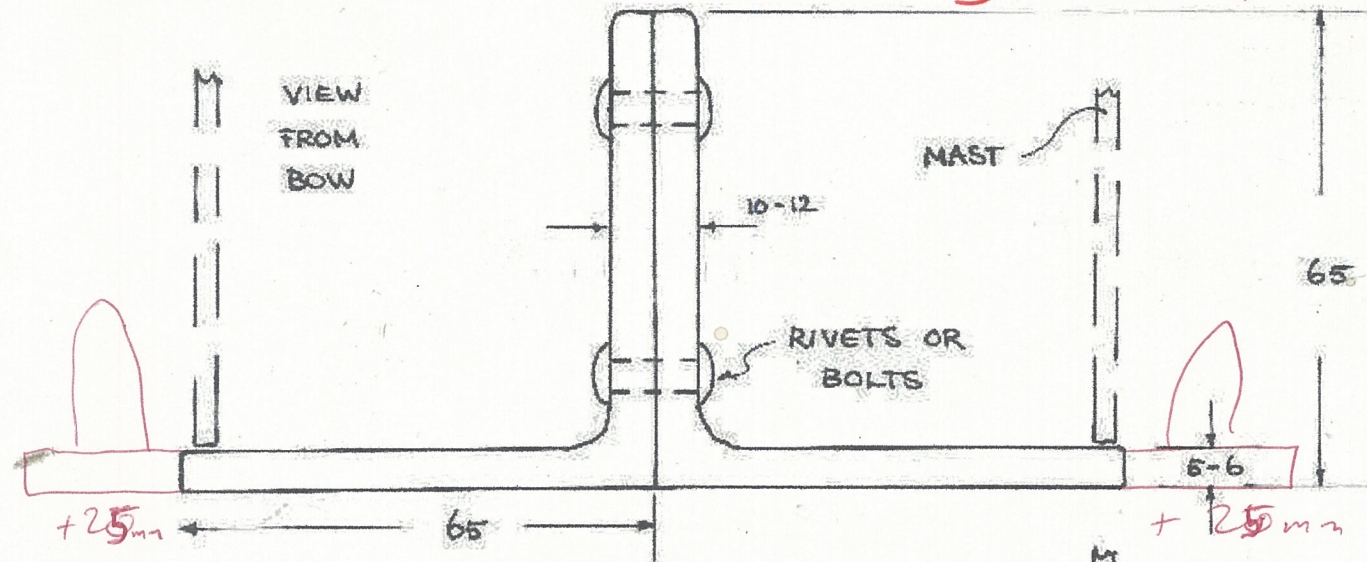

MAST FOOT
FOR 5"-127mm ϕ
ALUMINIUM MAST

NOT
ACTUAL SIZE

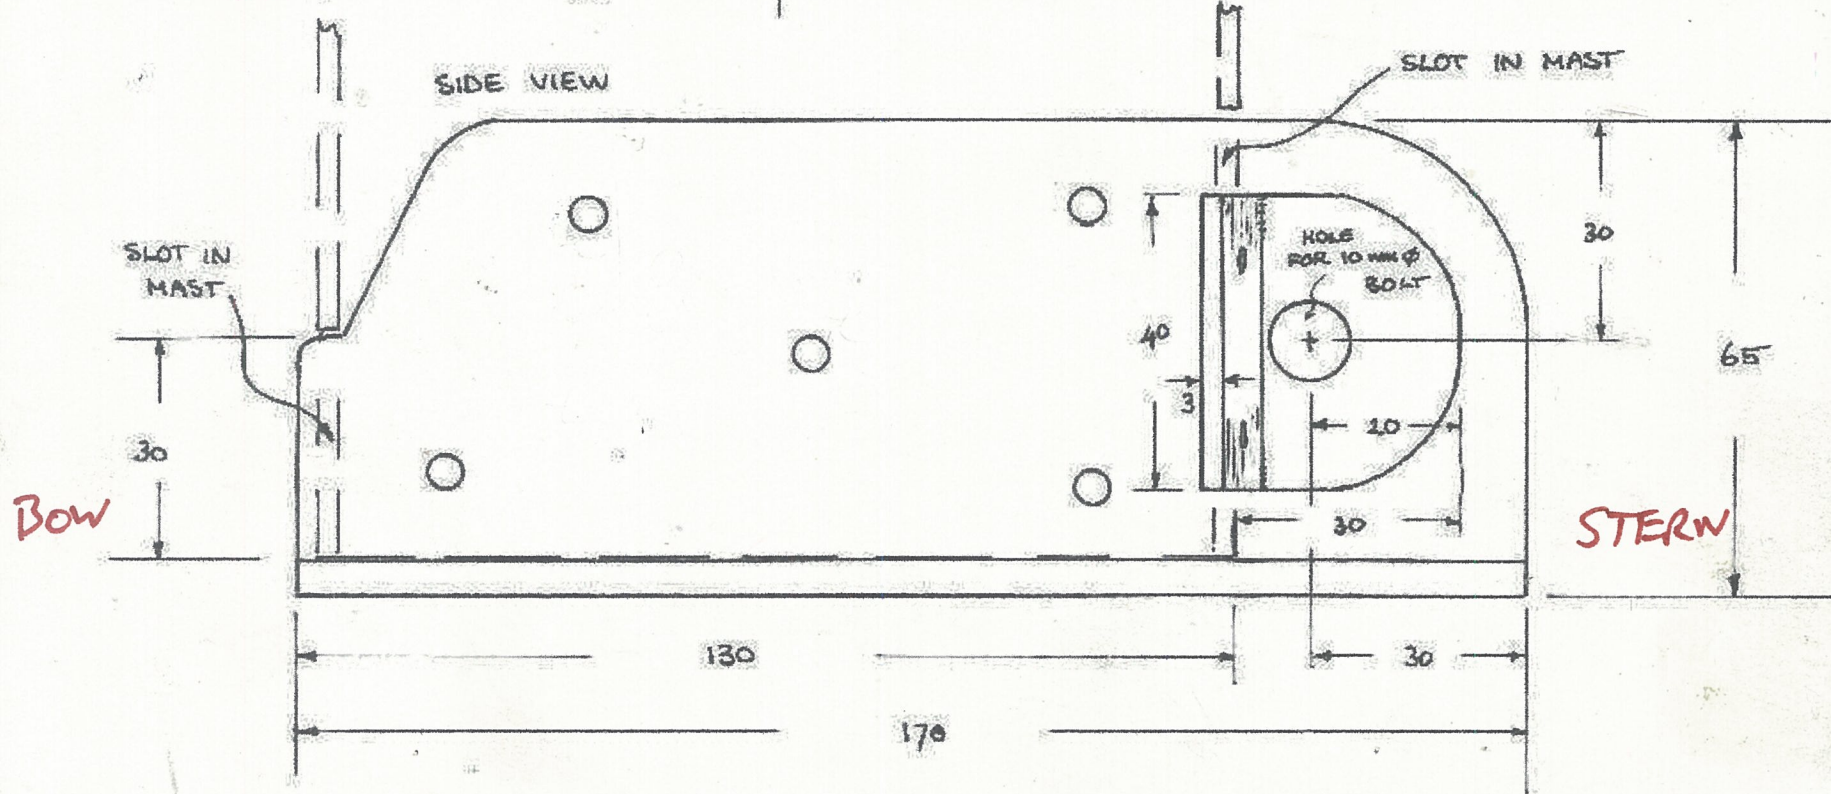

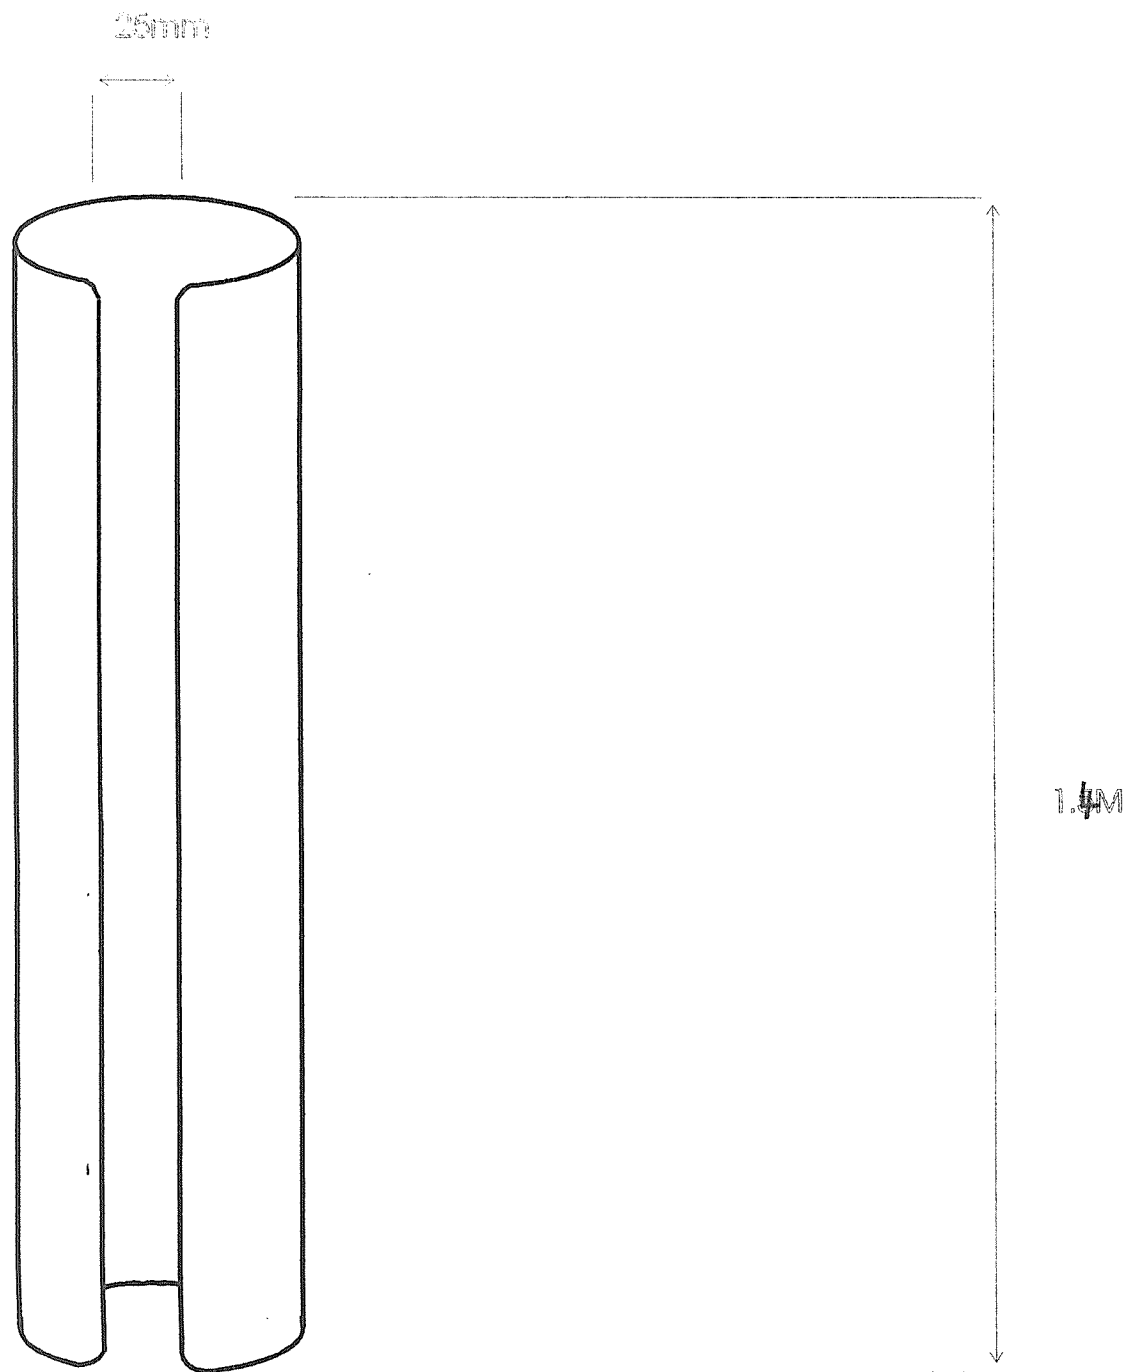



Tiki mast joint : Inner sleeve

Inserting joiner section

Worm-drive hose clip


Joiner section

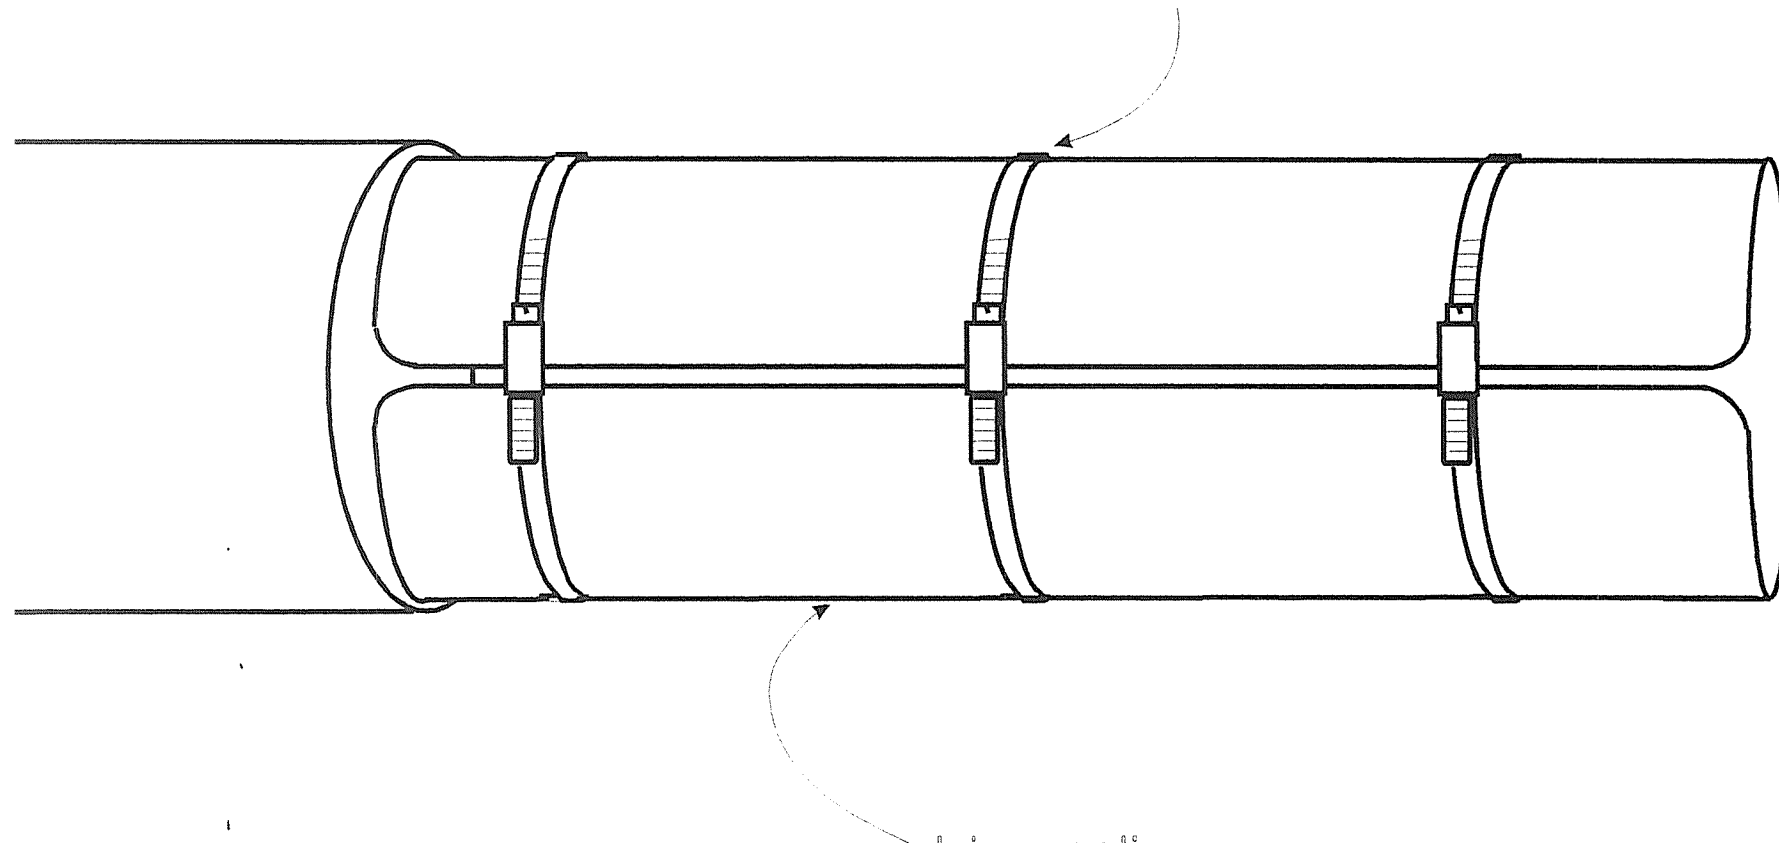


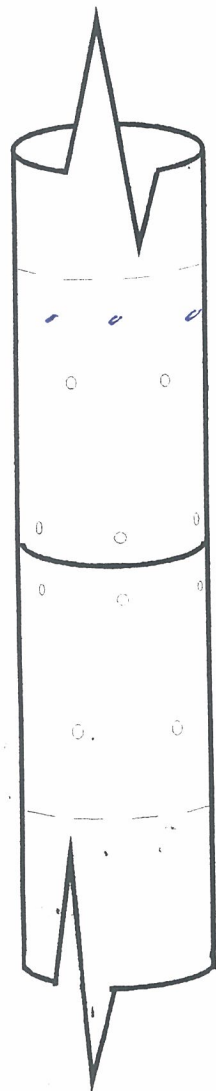


Tiki mast joint : General view

(Ar kaur 3 rows of rivets)

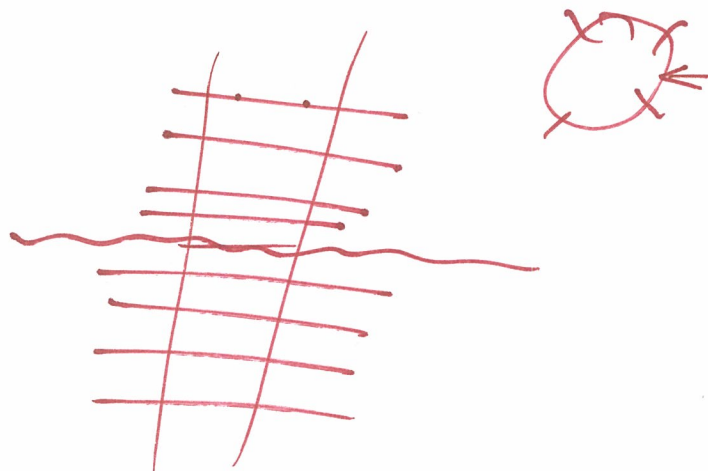

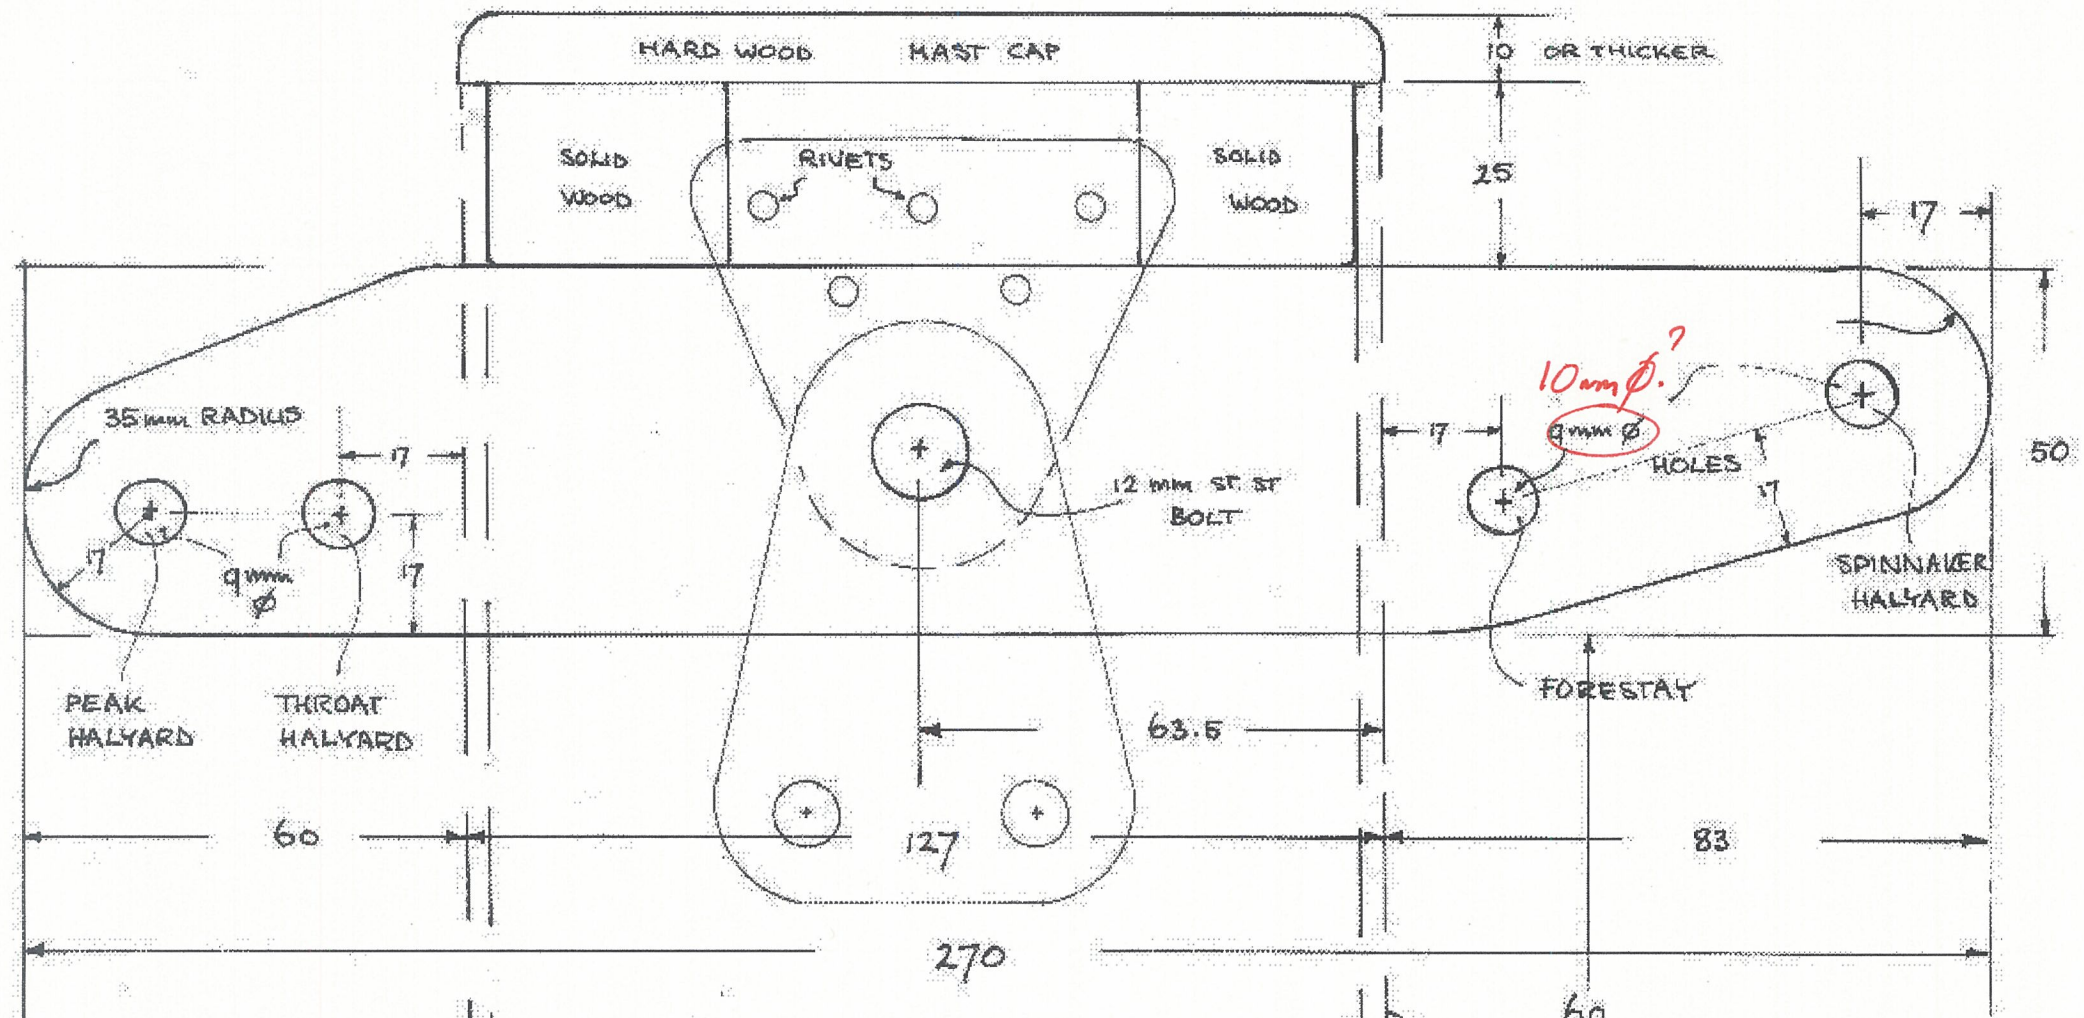


BAR THROUGH MAST
12mm ALUMINIUM
OR 8mm STAINLESS STEEL

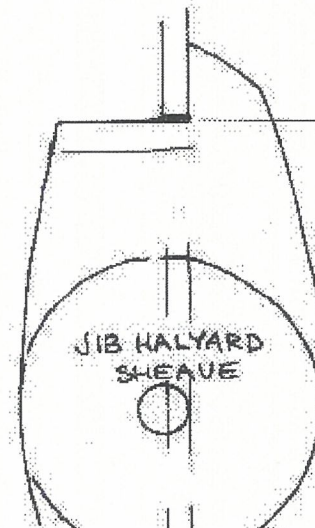

MAST HEAD
FOR 5"-127 mm ϕ
ALUMINIUM MAST


NOT
ACTUAL SIZE

MAST HEAD
DETAILS
ALUMINIUM MAST

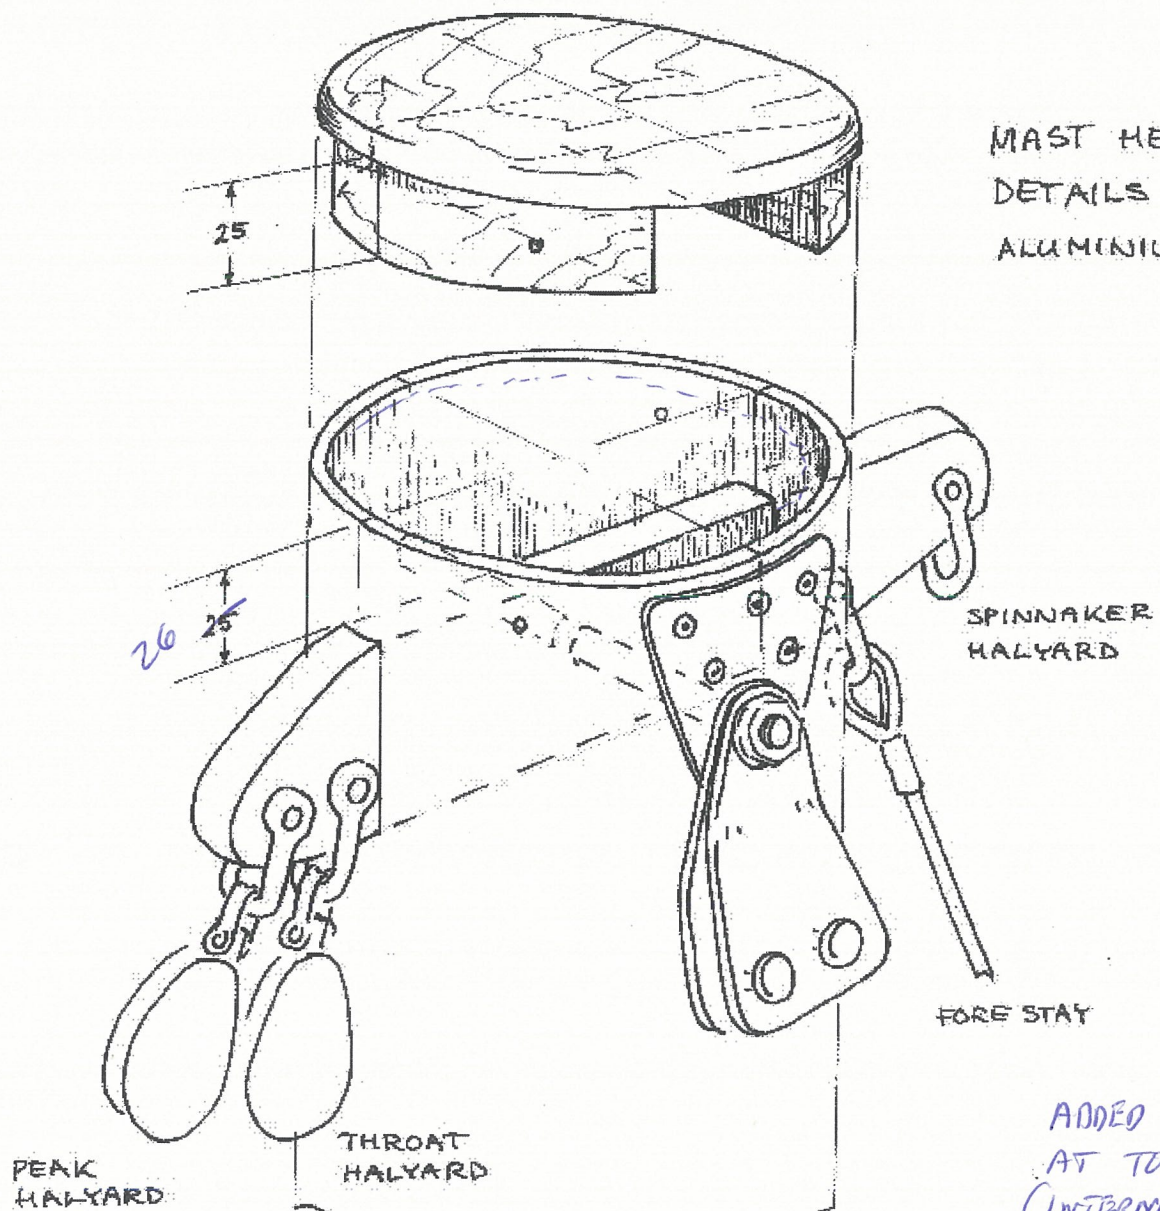

ADDED 4" COLLAR
AT TOP & BASE
(INTERNAL) FOR ADDED
STRENGTH

MAST FOOT
DETAILS

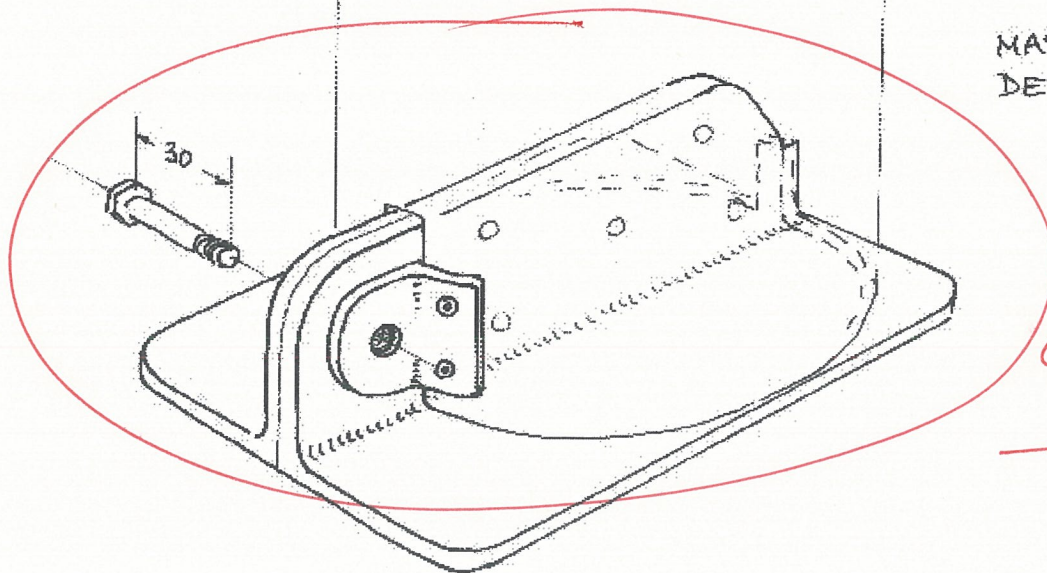

OPTION 1
MAST FOOT

HEAD

LEFT



FRONT

BACK

RIGHT

JIB HALLYARD
SHEEVE BLOCK TOP
- CENTRE FRONT

HEAD

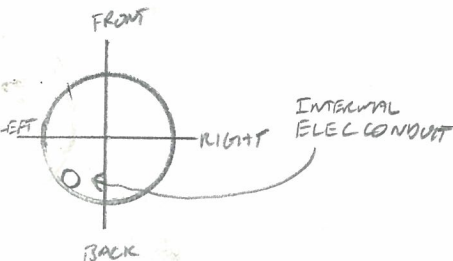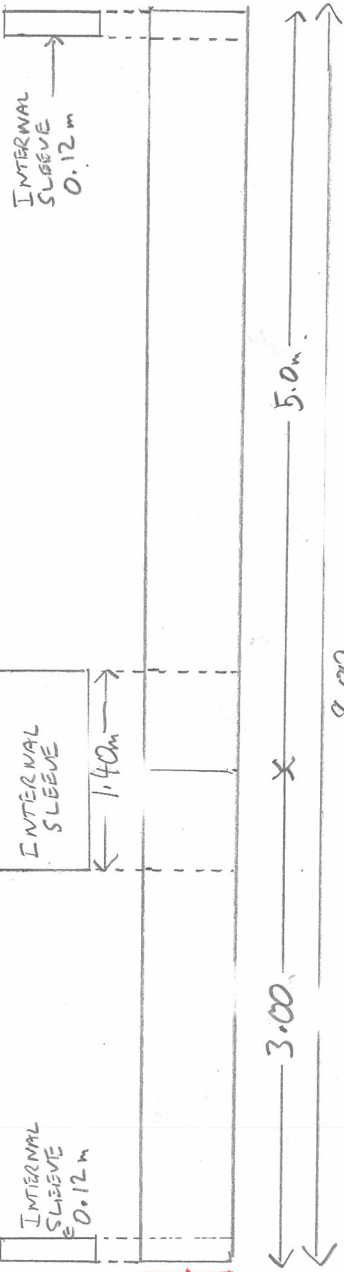

CLEAT & JIB HALLYARD SHEEVE
BLOCK BOTTOM
CENTRE RIGHT
OR SLIGHTLY FURTHER
TO REAR

DOWNHAUL
EYE PLATE
CENTRE FRONT

FRONT


BEAK & THROAT
HALLYARD
ROPE JAMMER
CENTRE REAR

BACK

FOOT

FOOT
5 1/2 ft
cut

SINGLE JIB
SPIN HALLMARK
EXTRINATL.

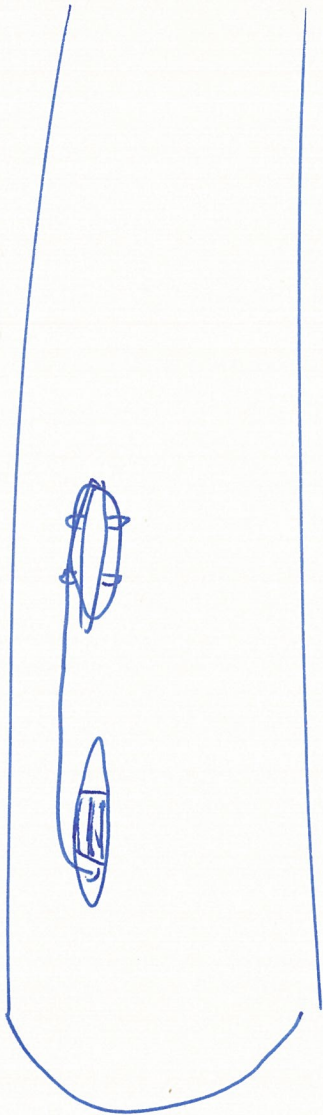

BACK.

FRONT



MAST IS
RAKED BACK
40° / 1:14
94°

OPTION 1
MAST FOOT.

